

64500 PRODUCT DETAILS

<i>Property</i>	<i>Details</i>
<i>Height</i>	1.06 in (26.92 mm)
<i>Width</i>	5.90 in (149.86 mm)
<i>Perimeter</i>	52.60 in
<i>Weight</i>	3.3 lbs per foot (4.91 kg per meter)
<i>Material</i>	6063-T5 Aluminum Extrusion Alloy




THERMAL DATA

Natural Convection: 1.33 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

Natural Convection

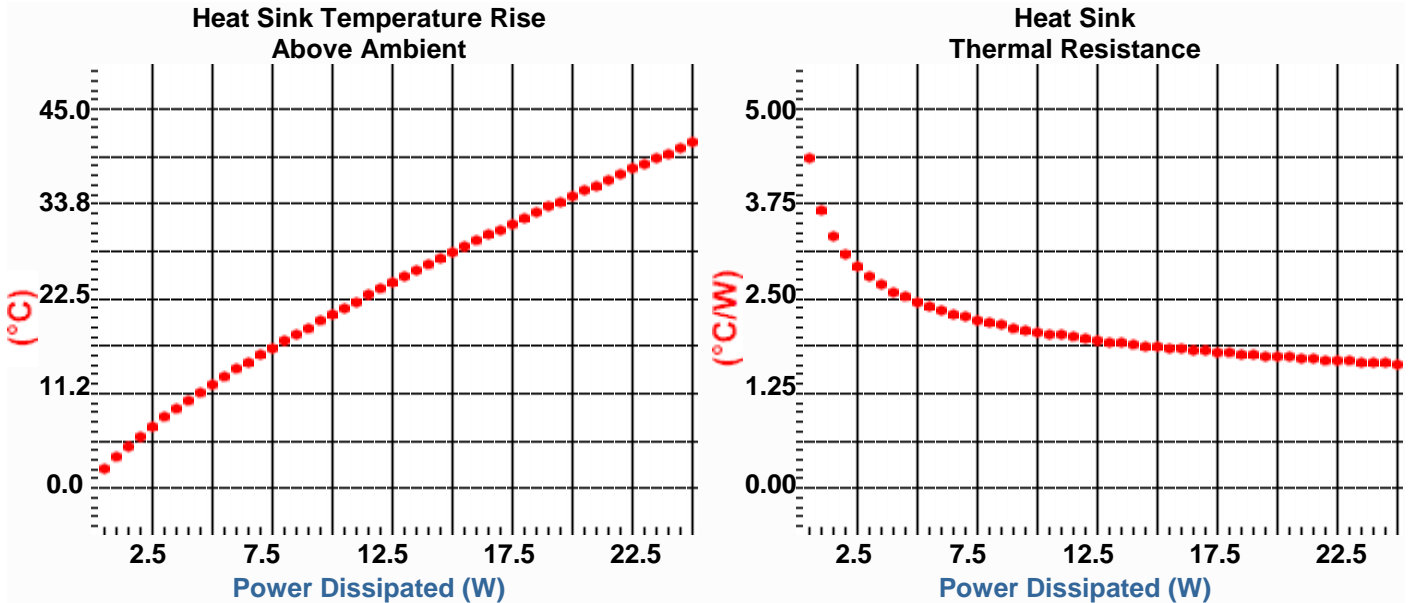

Forced Convection

